5-WAY 7-SPEAKER SYSTEM

LS-P9300

SERVICE MANUAL

KENWOOD

©1991-4 PRINTED IN JAPAN
B51-4425-00(T) 391

EXTERNAL VIEW

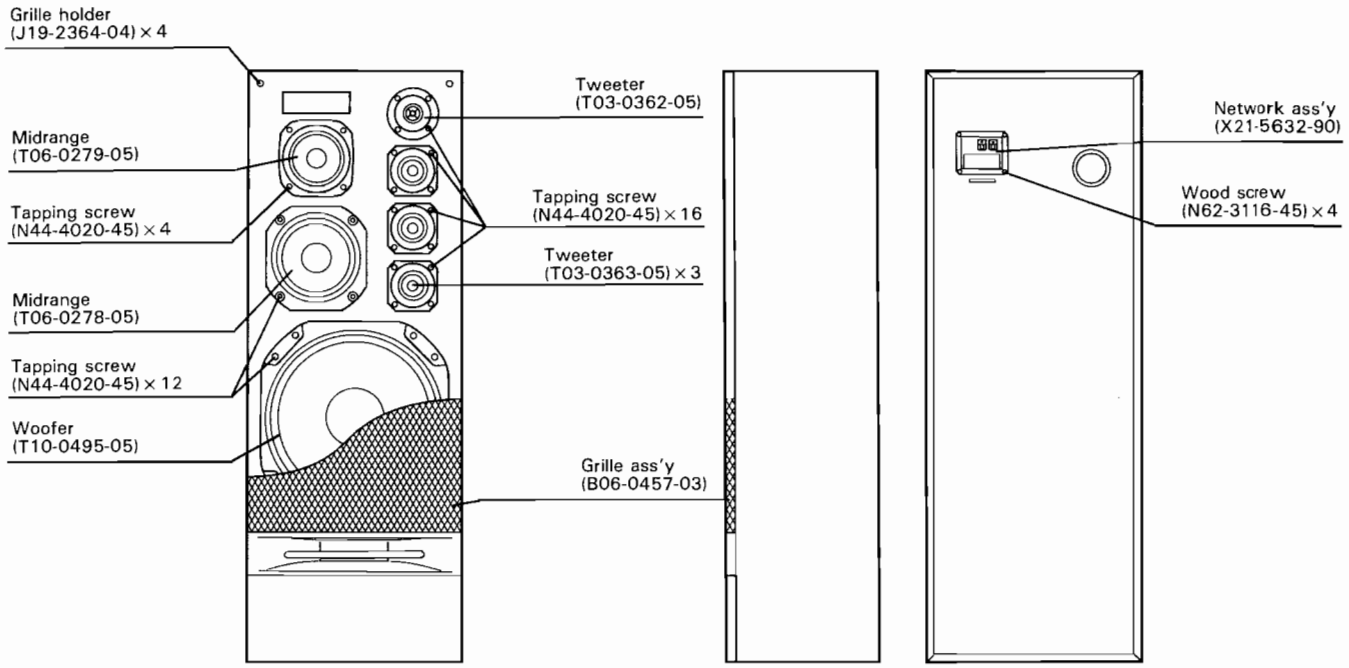

SPECIFICATIONS

Note:
KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

System	5-Way 7-Speaker System
Enclosure	Bass-Reflex, Floor Standing Type
Loudspeakers	
Woofer	380 mm (15 in) Cone Type
Midrange	130 mm (5 in) Cone Type
Midrange	200 mm (8 in) Cone Type
Tweeter	50 mm (2 in) Cone Type × 3
Tweeter	25 mm (1 in) Balanced Dome Type
Nominal Impedance	8 ohms
Peak Input Power	500 Watts
Sensitivity	94 dB/W at 1 m
Frequency Response	20 Hz to 30,000 Hz
Crossover Frequency	600 Hz, 1,500 Hz, 4,000 Hz, 10,000 Hz
Terminals	Push-Lever Type
Dimensions	Width: 440 mm (17-5/16 in) Height: 1,185 mm (46-5/8 in) Depth: 316 mm (12-7/16 in)
Net Weight	28 kg (61-3/4 lbs)
Enclosure Finish	High density particle board laminated with simulated wood grain vinyl.
Accessories	Speaker Wire

LS-P9300

SCHEMATIC DIAGRAM

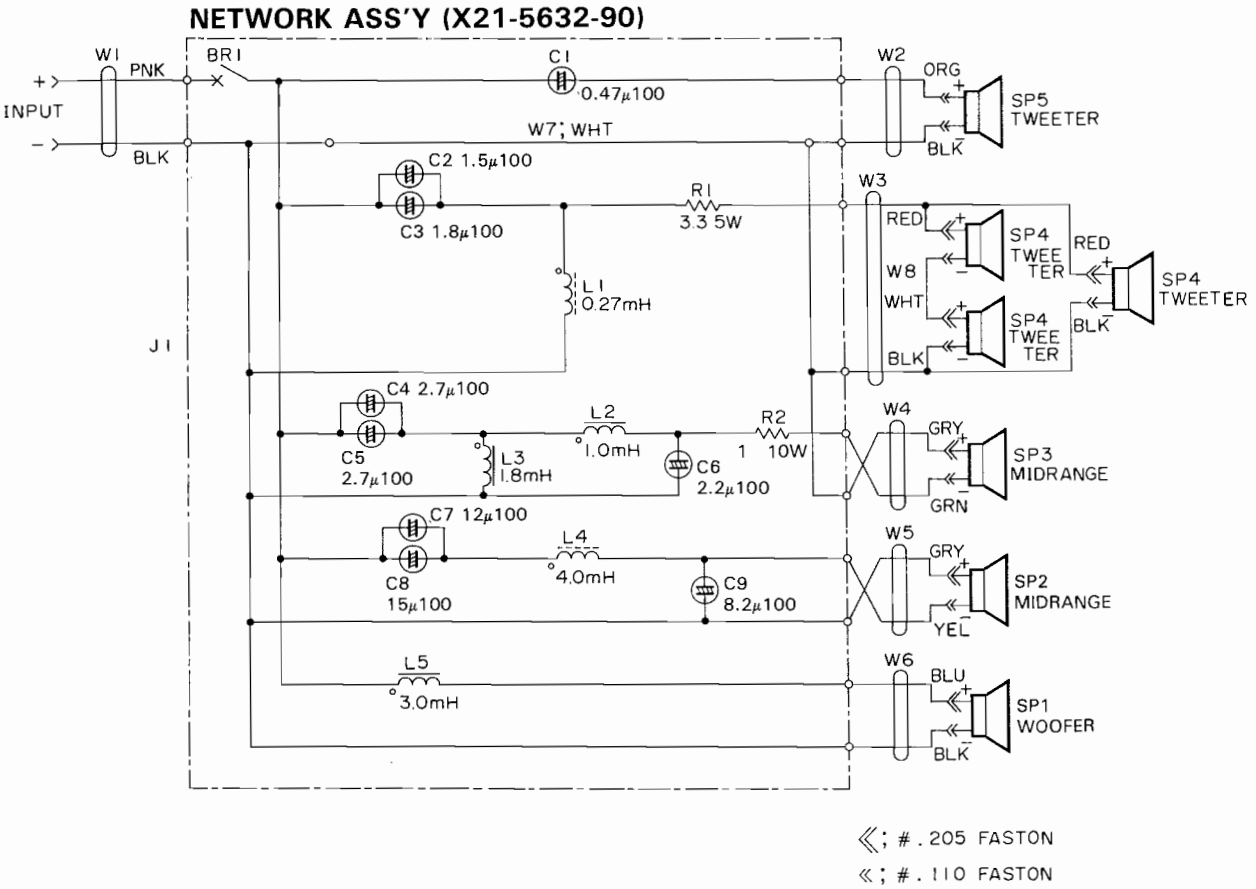

PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Telle ohne **Parts No.** werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
LS-P9300						
-		*	B06-0457-03	GRILLE ASSY		
-			B46-0094-03	WARRANTY CARD	Y	
-			B46-0095-03	WARRANTY CARD	Y	
-		*	B61-0439-00	INSTRUCTION CARD	M	
-		*	B61-0440-00	INSTRUCTION CARD	Y	
-			E29-0705-05	TERMINAL		
-			E30-1003-05	SPEAKER CORD		
-		*	H01-6946-04	CARTON BOX	M	
-		*	H01-6946-04	CARTON BOX	Y	
-			H10-3300-03	CORNER PAD		
-			H10-4065-04	CORNER PAD		
-			H11-0570-04	POLYSTYRENE FOAMED BOARD		
-		*	H21-1033-04	PROTECTION SHEET		
-			H25-0944-04	POLY BAG	Y	
-			J19-2364-04	GRILLE HOLDER		
-			J29-0215-05	P.C.B SUPPORTER		
-			N44-4020-45	TAPPING SCREW		
-			N62-3116-45	WOOD SCREW		
SP1		*	T10-0495-05	WOOFER		
SP2		*	T06-0278-05	MIDRANGE		
SP3			T06-0279-05	MIDRANGE		
SP4		*	T03-0363-05	TWEETER		
SP5		*	T03-0362-05	TWEETER		
NETWORK ASS'Y (X21-5632-90)						
C1			C90-1092-05	NP-ELEC 0.47UF 100WV		
C2			C90-1095-05	NP-ELEC 1.5UF 100WV		
C3			C90-1096-05	NP-ELEC 1.8UF 100WV		
C4 5			C90-1098-05	NP-ELEC 2.7UF 100WV		
C6			C90-1097-05	NP-ELEC 2.2UF 100WV		
C7			C90-1106-05	NP-ELEC 12UF 100WV		
C8			C90-1107-05	NP-ELEC 15UF 100WV		
C9			C90-1104-05	NP-ELEC 8.2UF 100WV		
L1			L38-0427-05	COIL 0.27mH		
L2			L38-0377-05	COIL 1.0mH		
L3			L38-0342-05	COIL 1.8mH		
L4		*	L38-0455-05	COIL 4.0mH		
L5			L38-0099-05	COIL 3.0mH		
-			N29-0035-05	NYLON RIVET		
-			N29-0117-05	NYLON RIVET		
R1			R92-0842-05	WIRE WOUND 3.3 K 5W		
R2			R92-0888-05	CEMENT 1.0 K 10W		
BR1			W02-0166-05	CIRCUIT PROTECTOR		

E: Scandinavia & Europe **K**: USA **P**: Canada
Y: PX(Far East, Hawaii) **T**: England **M**: Other Areas
Y: AAFES(Europe) **X**: Australia

⚠ indicates safety critical components.

LS-P9300

PACKING

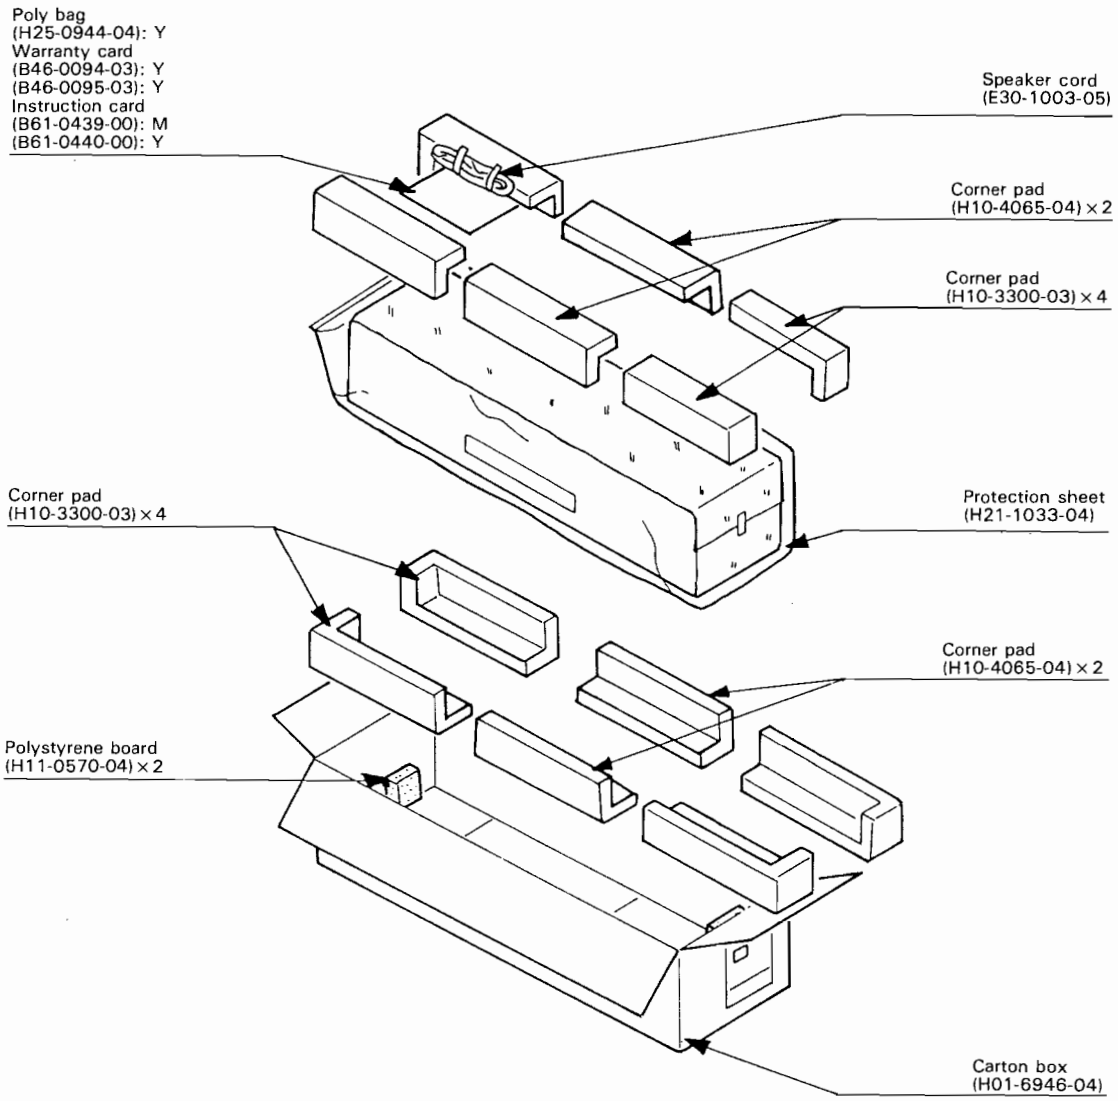

KENWOOD CORPORATION
Shionogi Shibuya Building, 17-5, 2-chome Shibuya, Shibuya-ku, Tokyo 150, Japan

KENWOOD U.S.A. CORPORATION
2201 East Dominguez Street, Long Beach, CA 90810;
550 Clark Drive, Mount Olive, NJ 07828, U.S.A.

KENWOOD ELECTRONICS CANADA INC.
P.O. BOX 1075, 959 Gana Court, Mississauga, Ontario, Canada L4T 4C2

TRIO-KENWOOD U.K. LTD.
KENWOOD House, Dwight Road, Watford, Herts., Wd1 8eb United Kingdom

KENWOOD ELECTRONICS BENELUX N.V.
Mechelsesteenweg 418 B-1930 Zaventem, Belgium

KENWOOD ELECTRONICS DEUTSCHLAND GMBH
Rembrücker-Str. 15, 6056 Heusenstamm, Germany

TRIO-KENWOOD FRANCE S.A.
13 Boulevard Ney, 75018 Paris, France

KENWOOD LINEAR S.p.A.
20125, MILANO-VIA ARBE, 50, ITALY

KENWOOD ELECTRONICS AUSTRALIA PTY, LTD.
P.O. BOX 504, 8 Figtree Drive, Australia Centre, Homebush N.S.W. 2140, Australia

KENWOOD & LEE ELECTRONICS, LTD.
Wang Kee Building, 4th Floor, 34-37, Connaught Road, Central, Hong Kong